

Spectrum Series



- Long-Term Storage**
- Low Nitrogen Consumption**
- Lightweight**
- Easy Maintenance**

The Spectrum series is designed for the user who has small capacity needs, but requires long-term storage and low liquid nitrogen consumption in a convenient lightweight package. By integrating features users requested with the widest variety of holding times and storage capacities, CHART Aluminum Freezers are the units of choice.



The SPECTRUM line is similar and updated with the latest Millennium flip-lid design

Accessories

- ¥ Transfer Hose
- ¥ Phase Separator
- ¥ Spare Corks
- ¥ Caster Base

Accessories (Cont'd)

- ¥ Canister
- ¥ Level Alarm
- ¥ Liquid Level Measuring Stick



LUNCESCU ENGINEERING & CONSULTING


Spectrum Series Specifications



Model	SPECTRUM 3	SPECTRUM 8	SPECTRUM 12	SPECTRUM 16	SPECTRUM 20	SPECTRUM 35
Max. Storage Capacity						
Number of canisters	6	6	6	9	6	6
No. of 1/2 cc straws (10/cane)	-	-	540	-	660	660
No. of 1/2 cc straws (1 Level Bulk)	732	732	732	1098	780	780
No. of 1, 2 & 2,0 ml vials (5/cane)	-	-	150	-	150	150
Performance						
Liquid nitrogen capacity (liters)	3,6	8,4	11,0	16,4	20,5	36,5
Static evaporation rate (liters/day)*	0,12	0,15	0,15	0,14	0,10	0,102
Static Holding Time (days)	30	56	73	117	205	360
Normal Working Duration (days)**	19	35	46	74	135	192
Unit Dimensions						
Neck opening (mm)	51,2	55,4	55,4	55,4	55,4	55,4
Overall height (mm)	406	470	549	444	652	657
Outside diameter (mm)	222	260	260	438	368	464
Canister height (mm)	127	127	279	127	279	279
Canister diameter (mm)	38	38	38	38	41,9	41,9
Weight empty (kg)	3,6	5,3	7,7	6,4	10,5	15,9
Weight full (kg)	6,5	12,1	16,6	19,6	27	44

*Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of the container use, atmospheric conditions, and manufacturing tolerances.

** Normal Working Duration is an arbitrary reference to establish container performance under normal operating conditions. Actual working time may vary due to current atmospheric conditions, container history, manufacturing tolerances and any individual patterns of use.

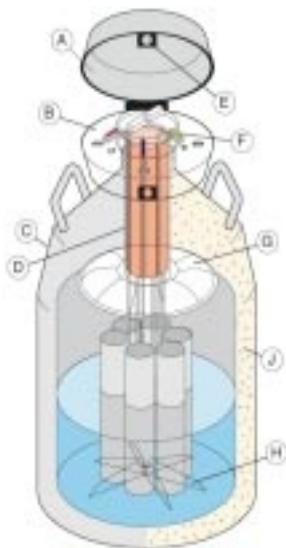

- A Durable, tamper-proof lid design
- B Easy maintenance lid design
- C Superior strength, lightweight aluminum construction
- D High strength neck tube reduces liquid nitrogen loss
- E Locking tab
- F Color-coded canister/lid numbering system
- G Advanced Chemical Vacuum Retention System - designed for superior vacuum performance over the life of the product
- H Spider design - for easy retrieval and insertion of product canisters
- J Insulation - MVE's advanced insulation system provides maximum thermal performance

Three Year Vacuum Warranty



LUNCESCU ENGINEERING & CONSULTING
 Kölner Street 9 □ D-40211 Düsseldorf □ Germany

Telephone: +49-(0)2111708612

email: m.luncescu@onlinehome.de

Fax: +49-(0)2111708613

mluncescu@hotmail.com